


HD 5' BORE CYLINDER



110 VOLT CHARGER

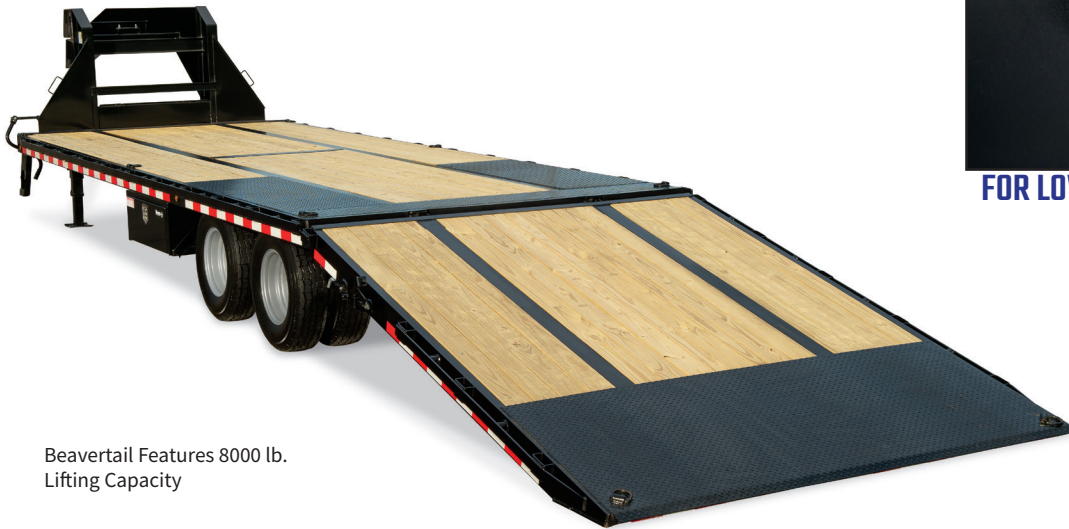

Beavertail Features 8000 lb.
Lifting Capacity

PIERCED FRAME



FOR LOWER DECK HEIGHT

SURE-TRAC DIFFERENCE

HD 5" Bore Twin Lift Cylinders in Beavertail
HD I-Beam Frame
Everlink™ - High Performance Wiring Harness
Sealed Brake Connections

FEATURES

Pressure-Treated 2 x 6 Decking
110 Volt Battery Charger
Oil Filled Hubs (Tandem Dual)
Radial Tires
Slipper Springs
All LED Lights
Dual HD 12K Dropleg Jacks
Toolbox Between Uprights On Gooseneck
Spare Tire Carrier
HD Stake Pockets and Rub Rail
(10) 5/8" D-Rings
Chain Spools
Side Steps
HD Bulkhead
Powder Coat Finish

OPTIONS

Brake Options
Battery Charger
Spare Tire
Color Options

[Contact Local Dealer For More Options](#)



SMART - CONFIDENT - PROVEN

HD LOW PROFILE DECKOVER W/ HYDRAULIC BEAVERTAIL SPECIFICATIONS

	8.5 X 20 + 10		
GVWR (lbs)	22500	25900	32000
GAWR (lbs/axle)	10000	12000	16000
Curb Weight	6520	6680	7580
Payload	15980	19220	24420
Main Frame	W12 x 19#/ft., I-Beam		W12 x 22#/ft. I-Beam
Side Rails	6" C-Channel		
Cross Members	3" C-Channel (16" On-Center)		3" Channel (12" On-Center)
Beaver Tail	Wood Deck		
Gooseneck Coupler	Adjustable 2-5/16 Ball		
Jack	Dual HD 12K Jacks with Toolbox		
Axles	Oil Bath Bearing		
Suspension	Slipper Leaf Spring		
Tires	235/80R16 LRE		215/75R17.5 LRH
Wheels	16", 8 on 6.5, Radial		17.5", 8 on 6.5, Radial
Decking	2" Pressure Treated Pine		
Lights	All LED Lights		
Electric Plug	7 Pole RV Molded Flat Blade		
Finish	Powder Coat High Gloss Black		
Overall Length	497"		
Deck Height	32"		
Coupler Height	Adjustable 31" - 39.75"		
Beavertail Payload	5000 lbs		
Beavertail Lifting Capacity	8000 lbs (Center of Tail)		
Load Angle	15 Degrees		

