


AIR BRAKE DECKOVER SPECIFICATIONS

SURE-TRAC
By Novae

1" D-RINGS



HUTCH SUSPENSION

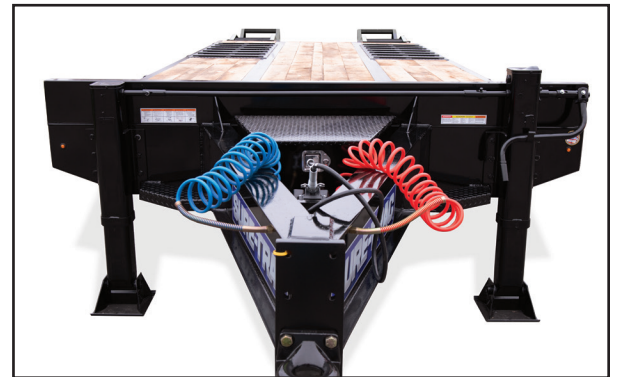

SURE-TRAC DIFFERENCE

Hi-Tensile Steel Construction
Full Pierced Beam Construction
Hutch H-9700 Suspension
All LED Lights
Everlink™ - High Performance Wiring Harness

FEATURES

2" Nominal Oak Decking
Oil-Bath Axles
17.5" Radial Tires
Dual 50K 2-Speed Jacks (Bolt-On)
Steel Plated Tongue
5' Fold-Flat Spring-Assist Wood-Filled Ramps
Fabricated Bulkhead
Lockable Toolbox In-Tongue
Spare Tire Carrier
Step On-Tongue (Driver's Side)
(12) 1" D-Rings
Safety Chains (5/8" High Test)
Glad Handle Holders
Mud Flaps
Cleated Wheel Covers
Powder Coat Finish

OPTIONS

Air Ride Suspension
Cleated Ramps
Hydraulic Ramps
Air-Assisted Ramps
5th Wheel
Color Options

Contact Local Dealer For More Options



SMART - CONFIDENT - PROVEN

AIR BRAKE DECKOVER SPECIFICATIONS

	8.5 x 20 + 5	8.5 x 24 + 5
GVWR (lbs)	49000	61000
GAWR (lbs/axle)	20000	20000
Curb Weight	9450	11300
Payload	39550	49700
Main Frame	W14 x 22#/ft. I-Beam	W14 x 26#/ft. I-Beam
Side Rails	8" C-Channel Side Rails	
Cross Members	6" Jr-I-Beam (16" On Ctr)	
Tongue	Steel Plated Tongue, 72" Length	
Beaver Tail	13 Degree, 60" Length	
Coupler	66K Pintle Eye	
Jack	Dual 50K 2-Speed Jacks (Bolt-On)	
Axles	Oil-Bath Axles	Oil-Bath Axles (Triple Axle)
Suspension	Hutch H-9700 Suspension	
Tires	215/75R17.5 LRH Tires	215/75R17.5 LRH Tires
Wheels	17.5", 8 on 6.5, Radial	17.5", 8 on 6.5, Radial
Decking	2" Nominal Oak Decking	
Lights	All LED Lights	
Electric Plug	7-Way Cold Temperature Semi-Style Plug	
Finish	Powder Coat High Gloss Black	
Overall Length	378"	426"
Deck Height	34-1/4"	34-1/4"
Coupler Height	Adjustable 21"-29"	

